
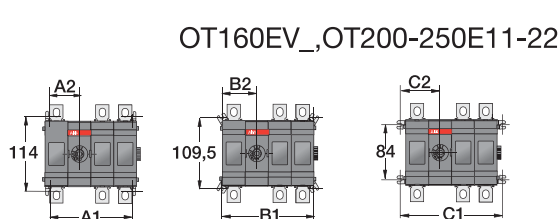
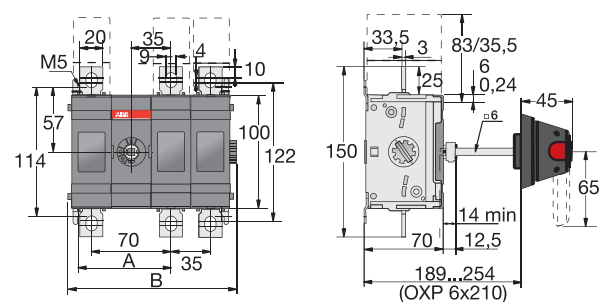
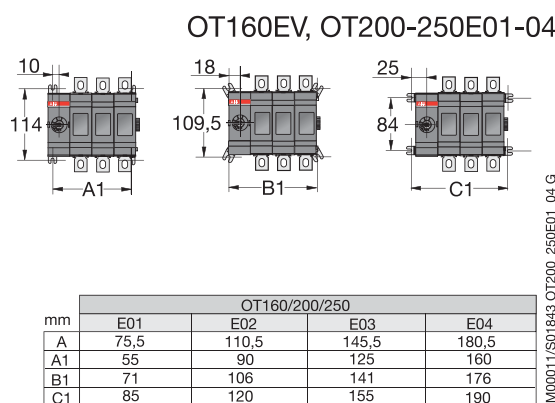
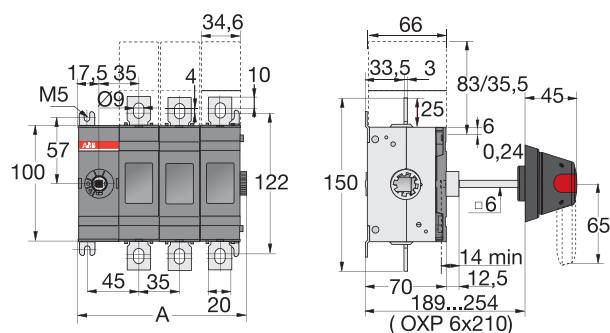


OT160EV /OT200E /OT250E

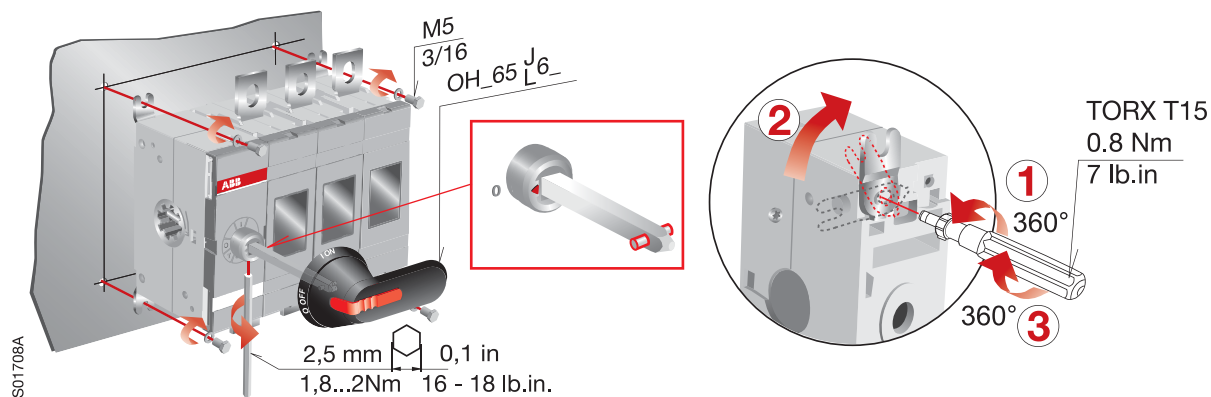

mm	OT160/200/250					
	E11	E12	E13	E22	E23	E33
A	80	80	80	115	115	150
B	115,5	150,5	185,5	185,5	220,5	255,5
A1	90	125	160	160	195	230
A2	45	45	45	80	80	115
B1	106	141	141	176	211	246
B2	53	53	53	88	88	123
C1	120	155	190	190	225	260
C2	60	60	60	95	95	130



M00011/S01843 OT200 250E01 04 G

M000017/QT200 250E11 22 H

OT160-250

OT200U_, OT160EV_W, OT200-250E_W



OT160-250_01-04

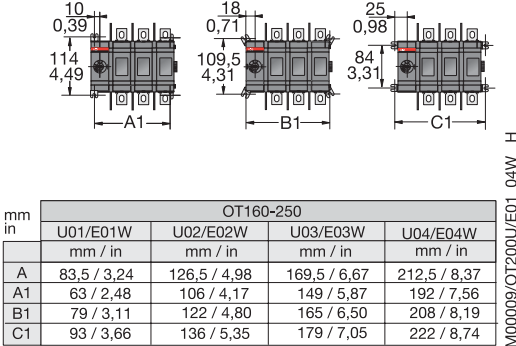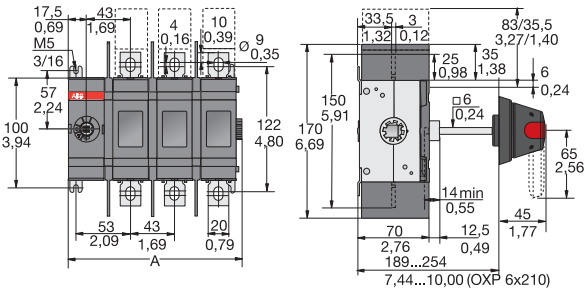

mm in	OT160-250			
	U01/E01W	U02/E02W	U03/E03W	U04/E04W
	mm / in	mm / in	mm / in	mm / in
A	83,5 / 3,24	126,5 / 4,98	169,5 / 6,67	212,5 / 8,37
A1	63 / 2,48	106 / 4,17	149 / 5,87	192 / 7,56
B1	79 / 3,11	122 / 4,80	165 / 6,50	208 / 8,19
C1	93 / 3,66	136 / 5,35	179 / 7,05	222 / 8,74

M00009/OT200U/E01_04W


OT160-250_11-22

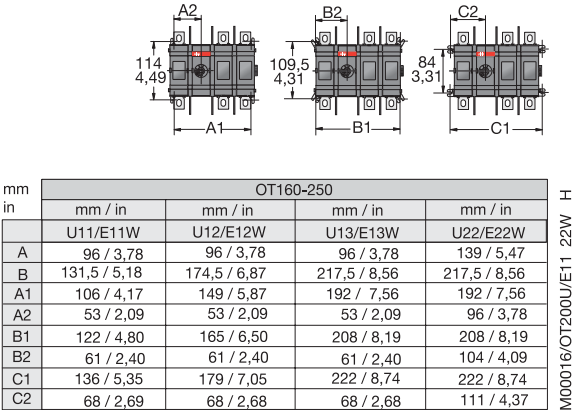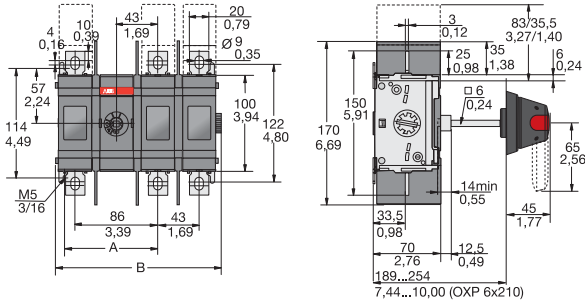


mm in	OT160-250			
	U11/E11W	U12/E12W	U13/E13W	U22/E22W
	mm / in	mm / in	mm / in	mm / in
A	96 / 3,78	96 / 3,78	96 / 3,78	139 / 5,47
B	131,5 / 5,18	174,5 / 6,87	217,5 / 8,56	217,5 / 8,56
A1	106 / 4,17	149 / 5,87	192 / 7,56	192 / 7,56
A2	53 / 2,09	53 / 2,09	53 / 2,09	96 / 3,78
B1	122 / 4,80	165 / 6,50	208 / 8,19	208 / 8,19
B2	61 / 2,40	61 / 2,40	61 / 2,40	104 / 4,09
C1	136 / 5,35	179 / 7,05	222 / 8,74	222 / 8,74
C2	68 / 2,69	68 / 2,68	68 / 2,68	111 / 4,37

M00016/OT200U/E11_22W

OTS_

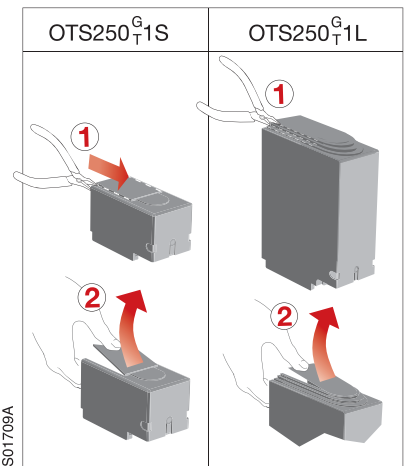


S01709A

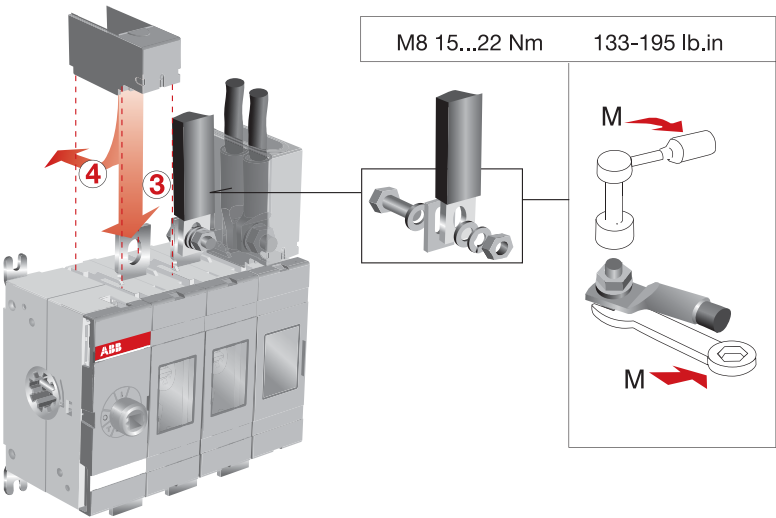


OT160-250

OTV_

OTV250EK

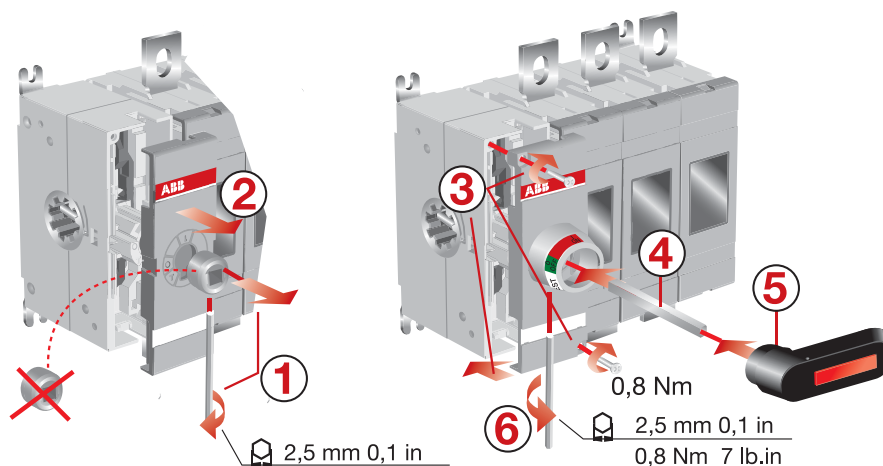


A00097A

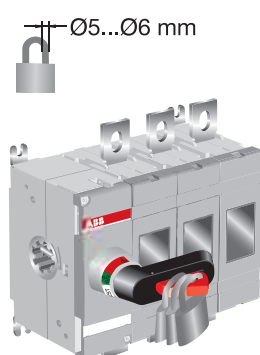






Ø5...Ø6 mm

Note: Use protection against direct contact. For example:

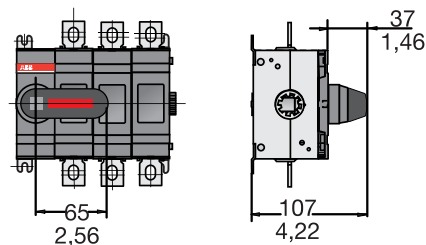

OTZT1_

OTZT1_

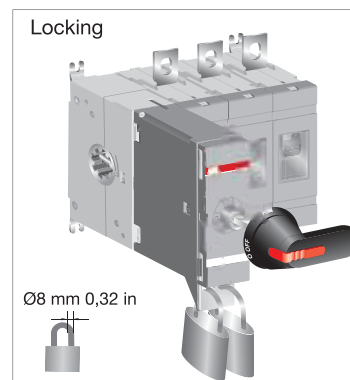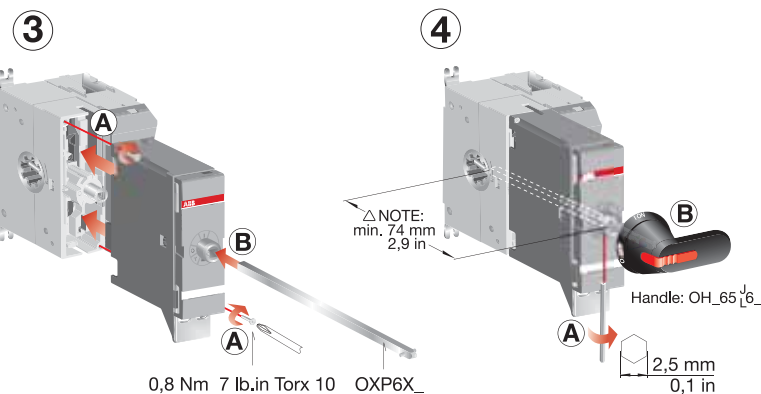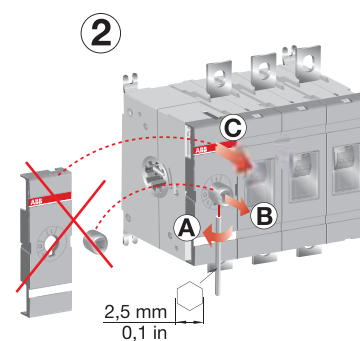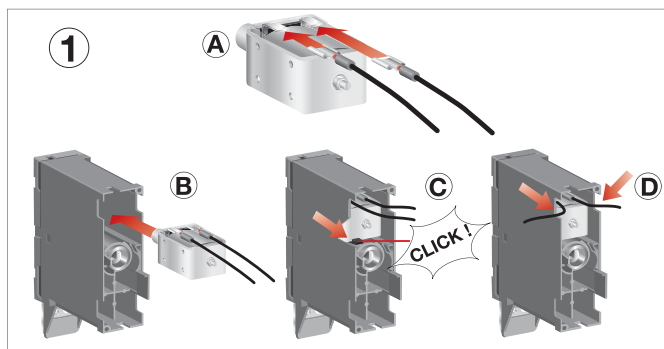


A04016


OT160-250

OA_

NO: OA1G10
NC: OA3G01

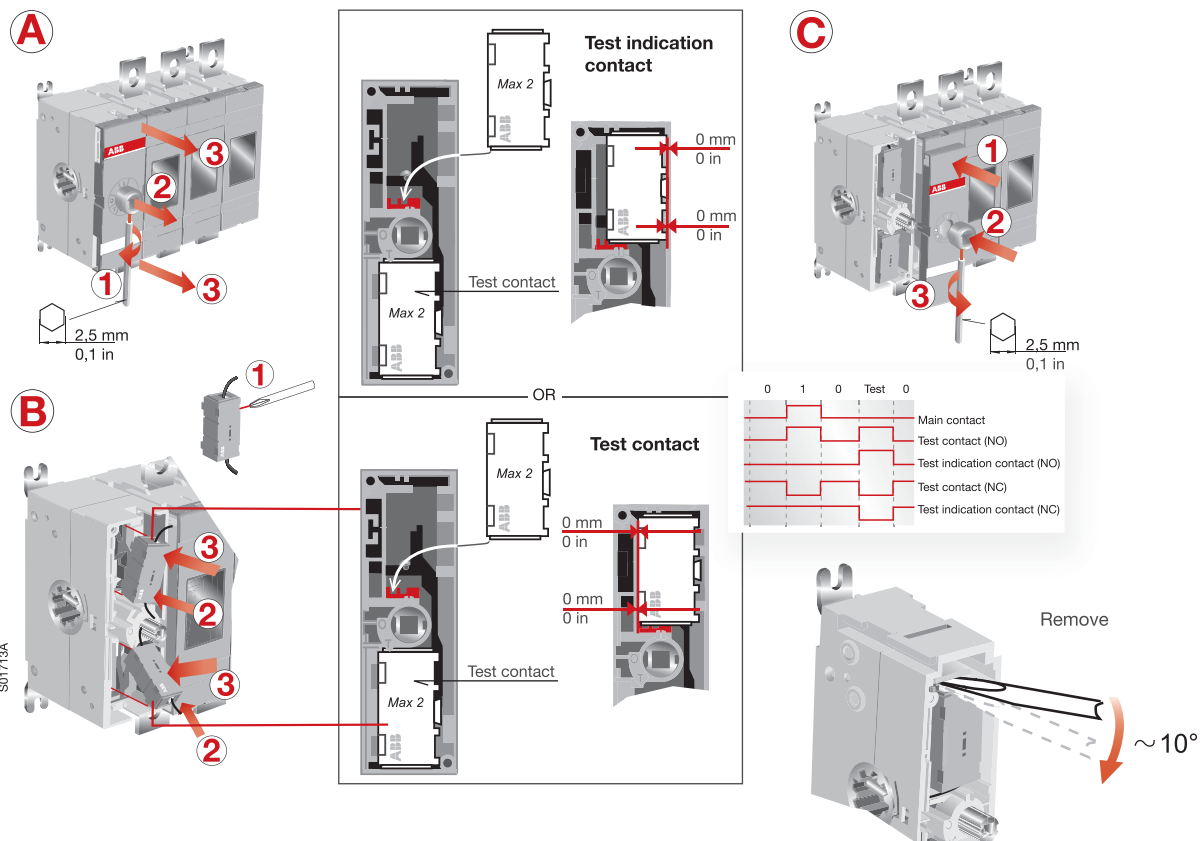


OTZ250E

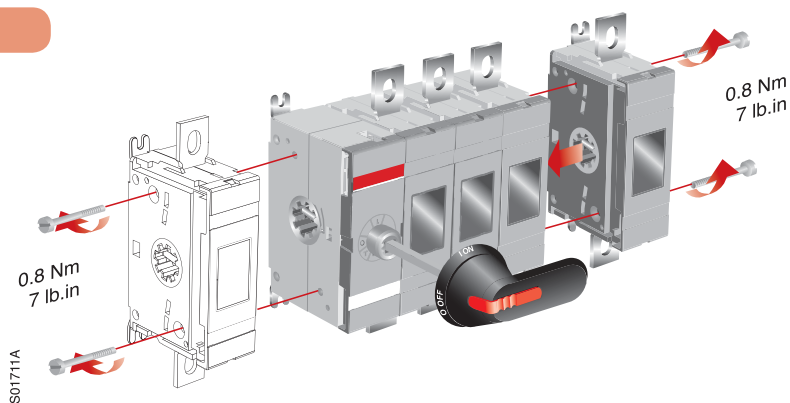


OZX_

OT160EV_, OT200, OT250
OZXB1L OZXB2 OZXB2L OZXB8
OT200U
OZXA-200_ OZXA-206_

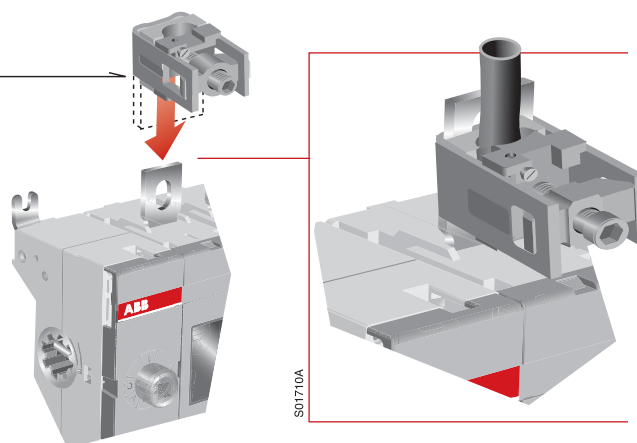


OT160-250

Label

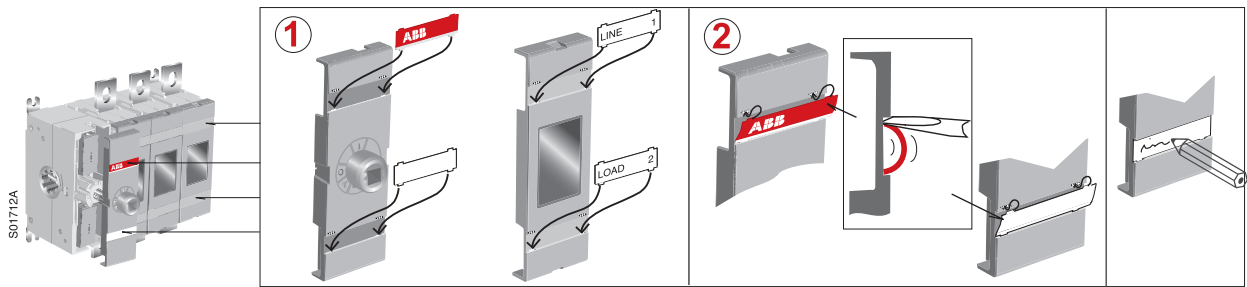

Clearances per UL98

Minimum enclosure size or equivalent volume

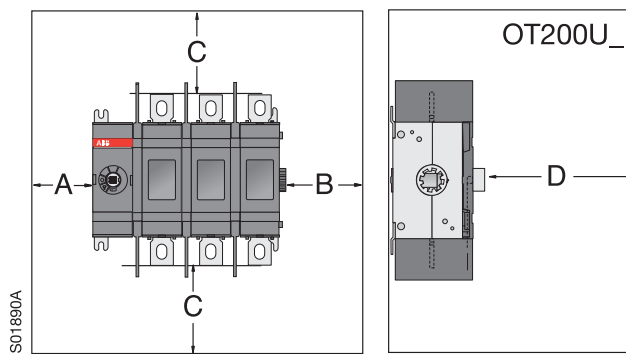

Height	Width	Depth
406 mm 16 in	x 255 mm x 10 in	x 152 mm x 6 in

A	B	D
0	13 mm 0,5 in	13 mm 0,5 in

C Cable size	
AWG	
4-3	100 mm 4 in
2	100 mm 4 in
1	100 mm 4 in
1/0	125 mm 5 in
2/0	150 mm 6 in
3/0-4/0	175 mm 7 in
MCM	
250	200 mm 8 in
300	250 mm 10 in

OEA_

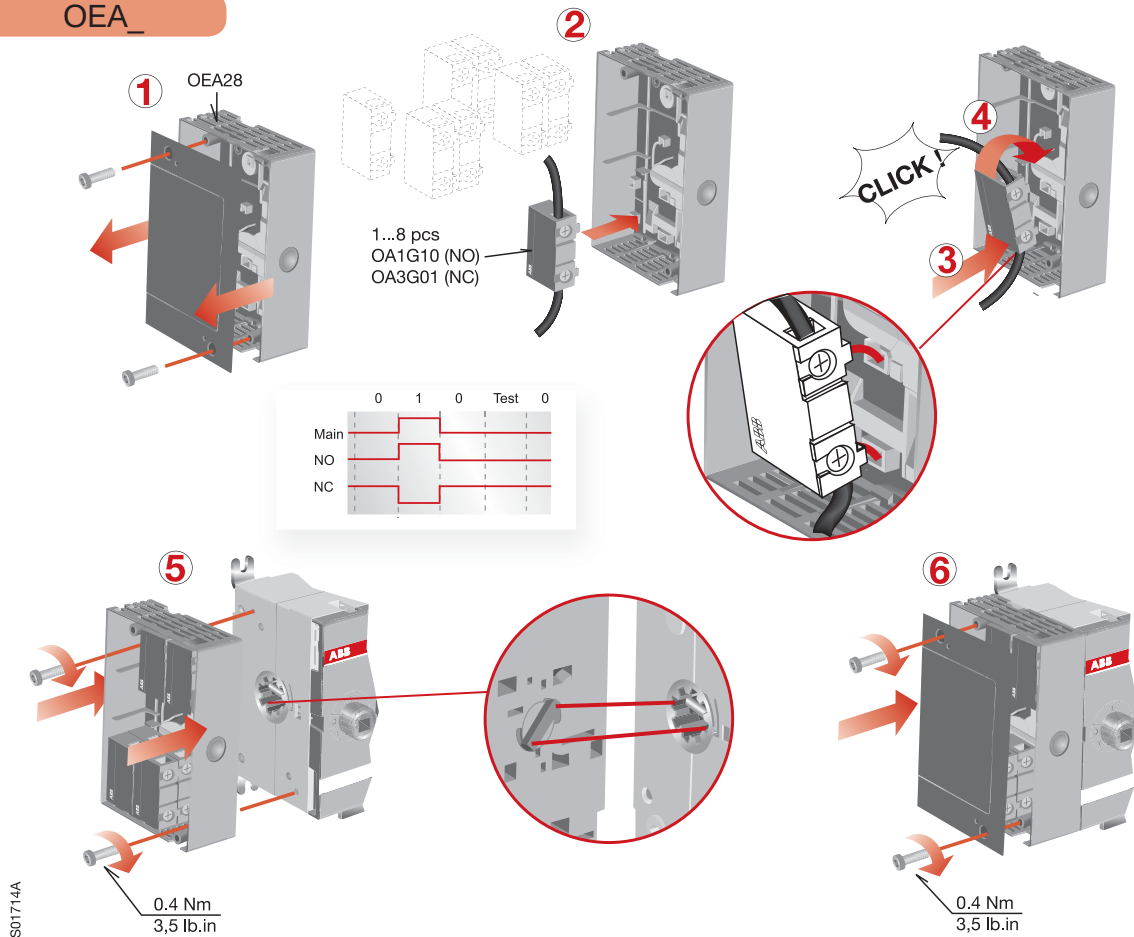


ABB Oy
Low Voltage Switches
P.O. Box 622 Telephone +358 10 2211
FIN-65101 Vaasa, Finland Telefax +358 10 224 5708