
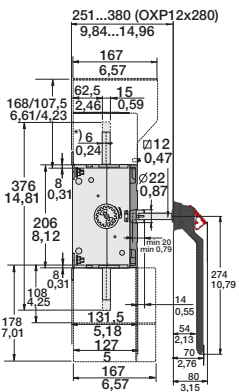
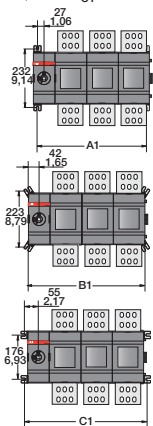


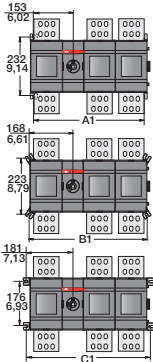



OT2000-2500

1SCC301078M0202

Document no. 34OT2000-2500 B

OT2000-2500_

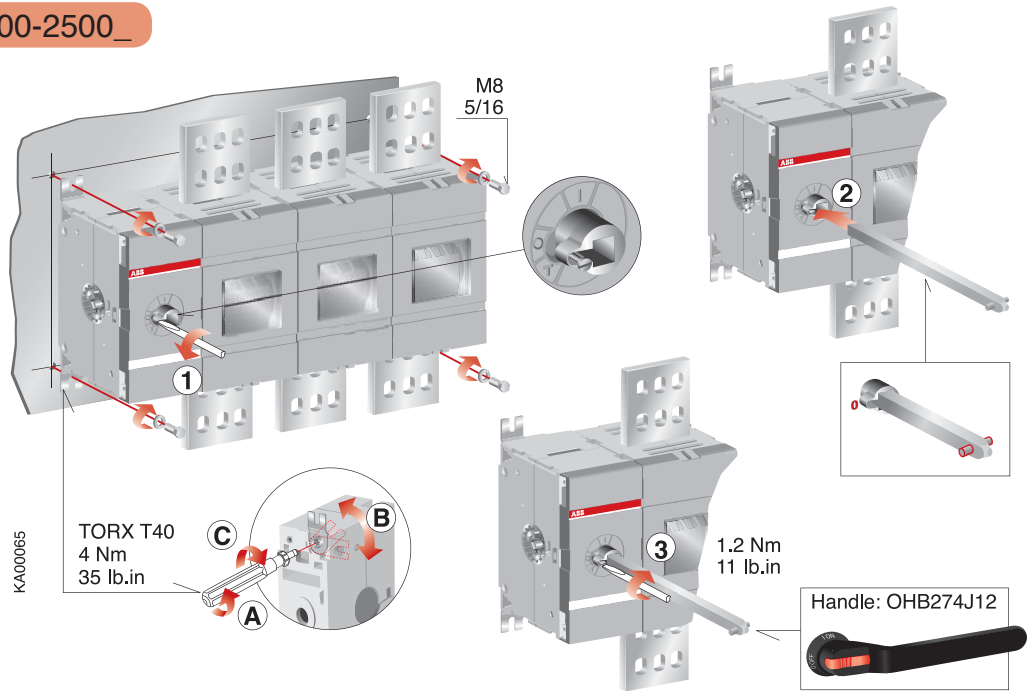

*) N3 types

OT 2000/ 2500E_												
	01	02	03	04	11	12	13	22	03W4	04W4	03W8	04W8
A	mm	126	126	126	126	126	126	126	140	140	185	185
	in	4,96	4,96	4,96	4,96	4,96	4,96	4,96	5,51	5,51	7,28	7,28
B	mm	220,5	346,5	472,5	598,5	346,5	472,5	598,5	500,5	640,5	590,5	775,5
	in	8,68	13,64	18,60	23,56	13,64	18,60	23,56	19,70	25,22	23,25	30,53
A1	mm	180	306	432	558	306	432	558	460	600	550	735
	in	7,09	12,05	17,01	21,97	12,05	17,01	21,97	18,11	23,62	21,65	28,94
B1	mm	210	336	462	588	336	462	588	490	630	580	765
	in	8,27	13,23	18,19	23,15	13,23	18,19	23,15	19,29	24,80	22,83	30,12
C1	mm	236	362	488	614	362	488	614	516	656	606	791
	in	9,29	14,25	19,21	24,17	14,25	19,21	24,17	20,31	25,83	23,86	31,14


OT2000-2500

OZX_


OT2000-2500

OZXB3
OZXB4
OZXB5
OZXB6
OZXB7L


A04027

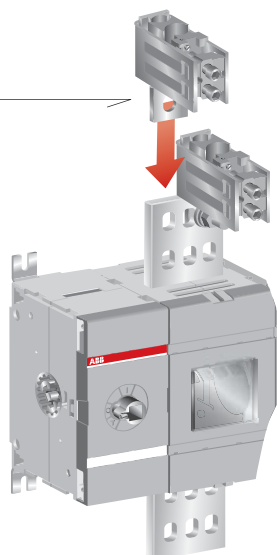

Label


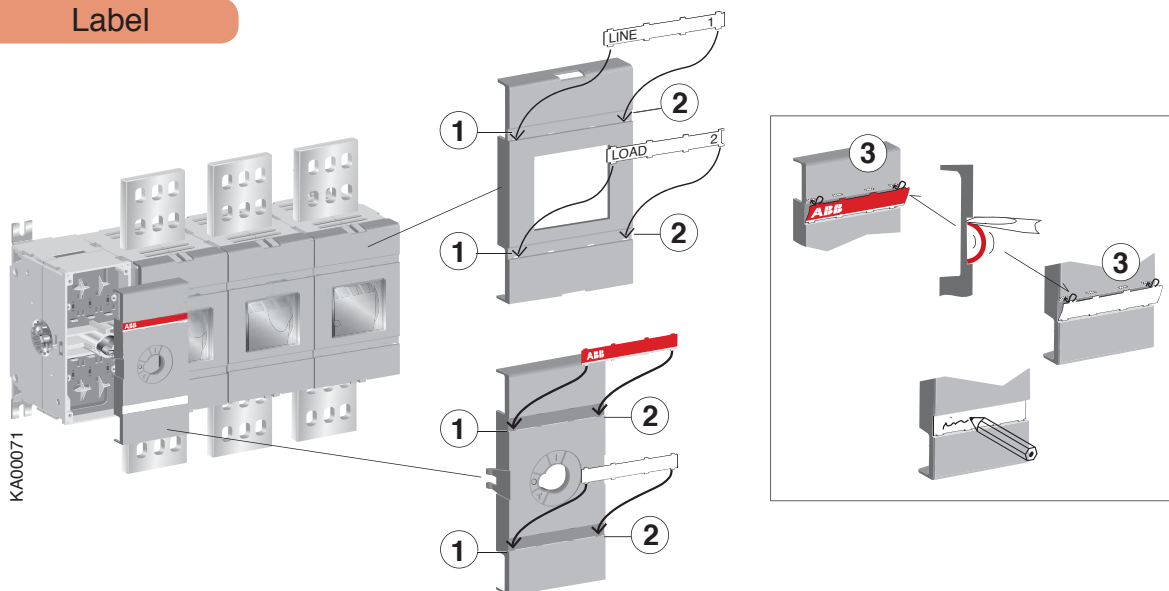


OTZ2500E


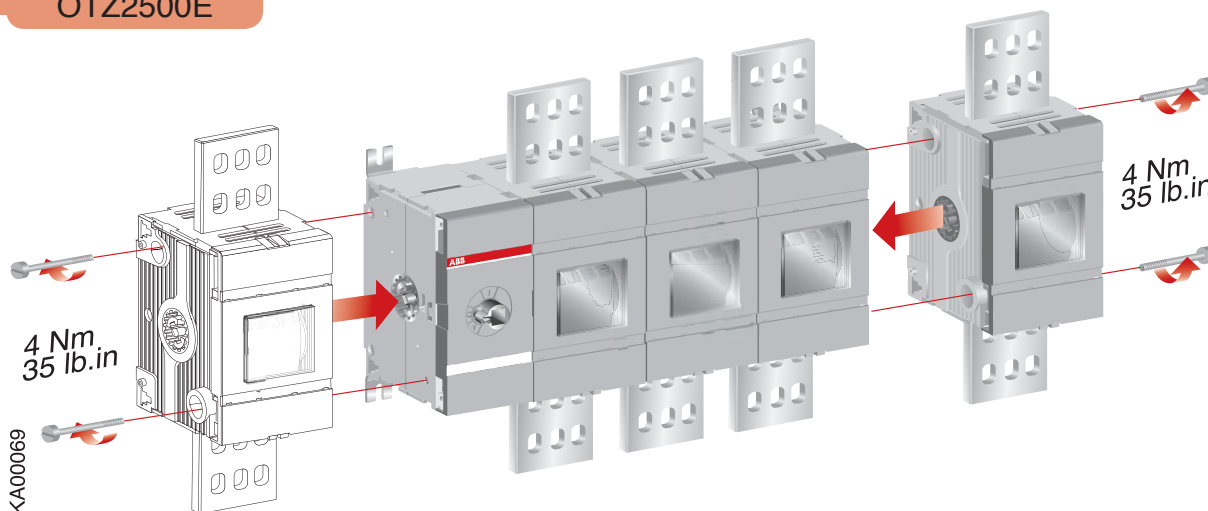


OT2000-2500

OTS_

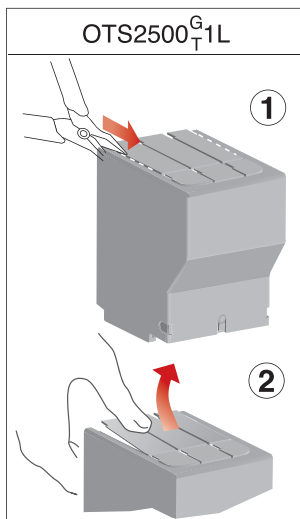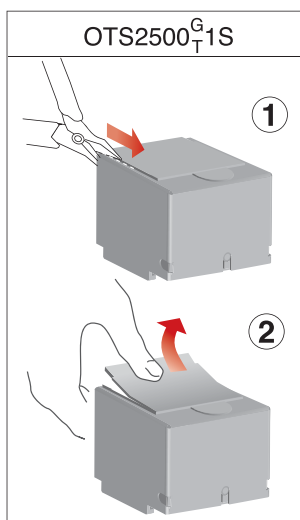

KA00066

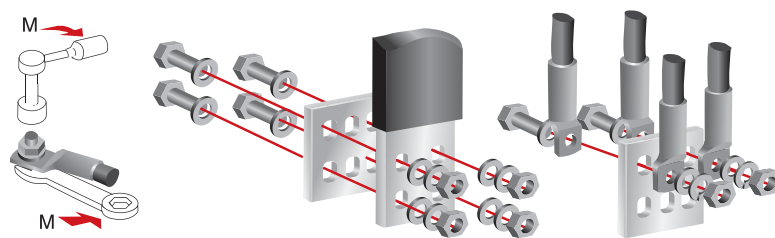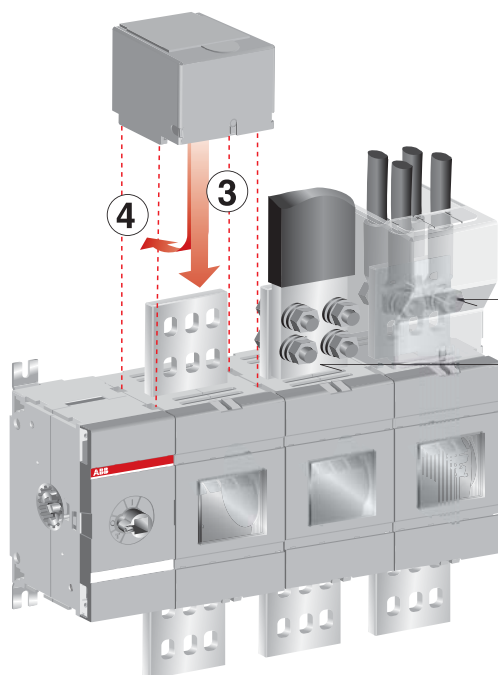


M12





50...75 Nm

443-664 lb.in

OT_N3 & OXN1250T



AB0011




OT2000-2500

OTB_



Type for package of 6 barriers is OTB1600/6.

Barriers 68912 or shrouds must be used on all types at voltages ≥ 500 V

A04028

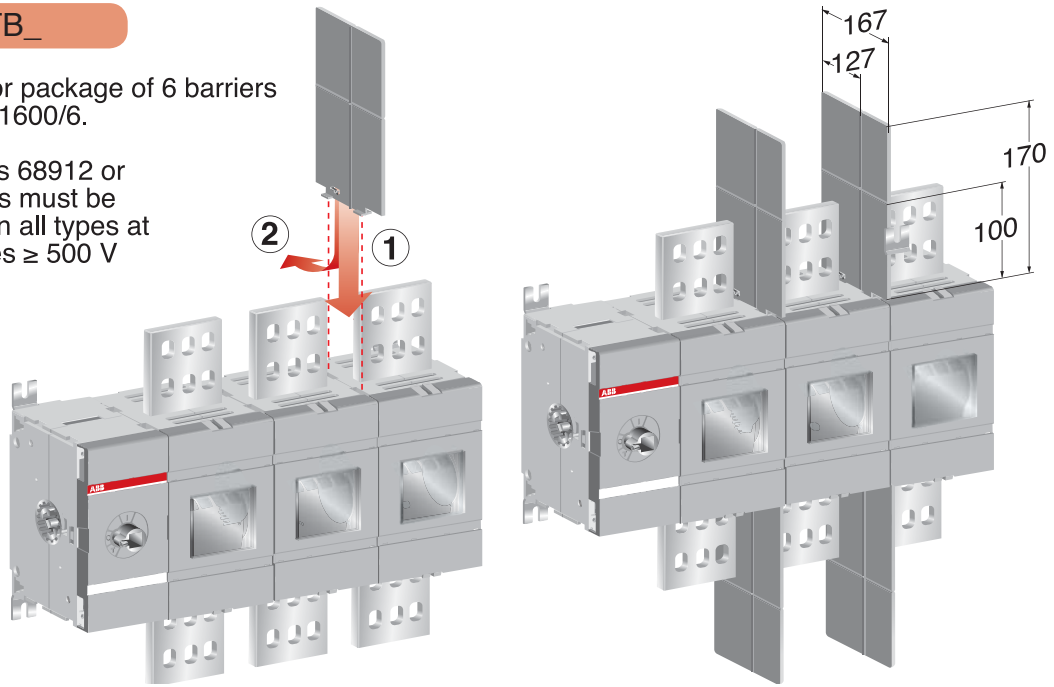





OEA28

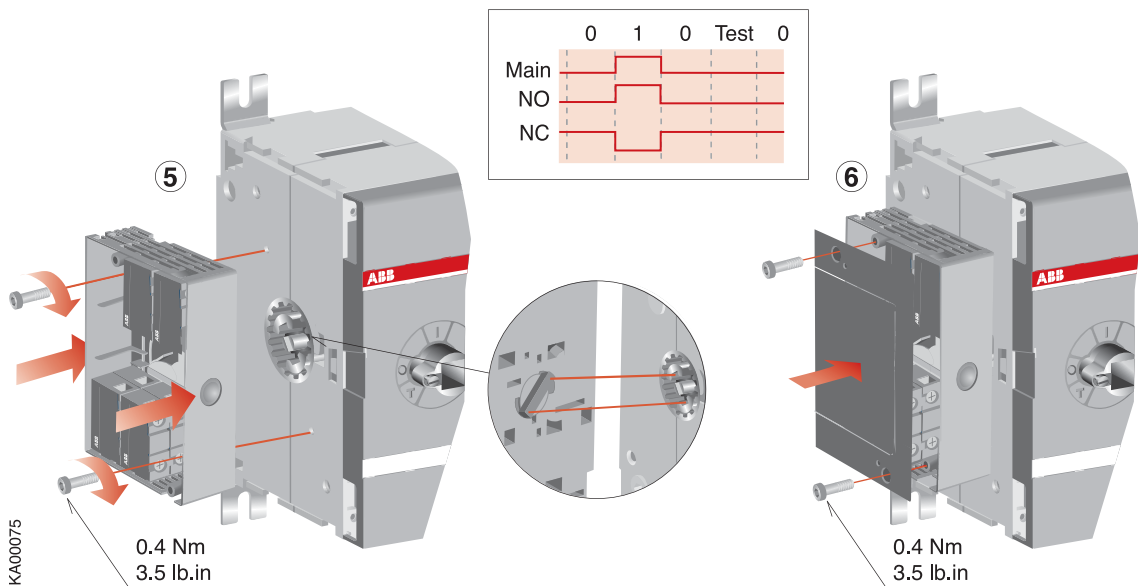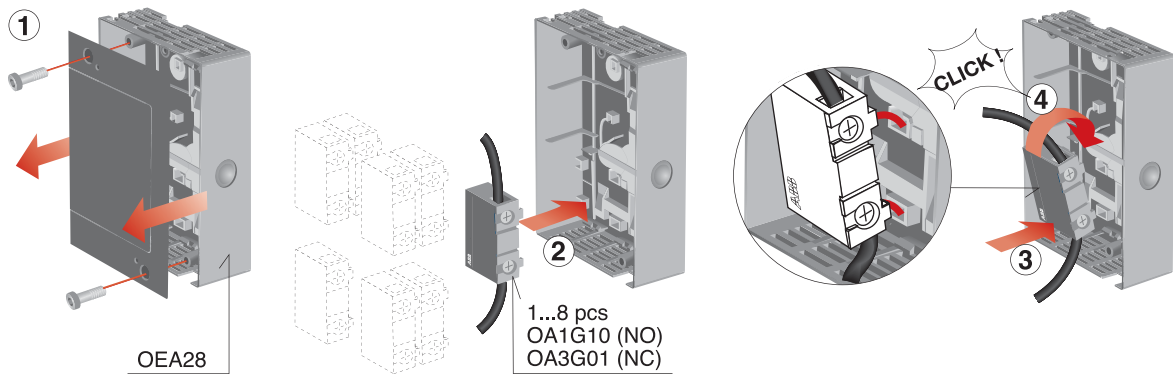


OT2000-2500

OTV_


OTV1000EK

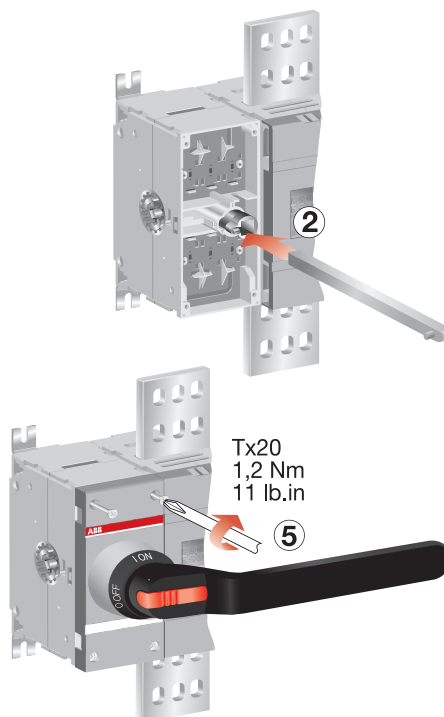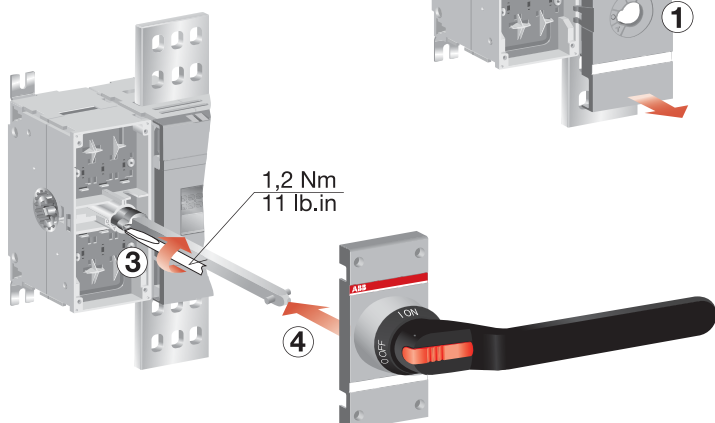

Note: Use protection against direct contact. For example:

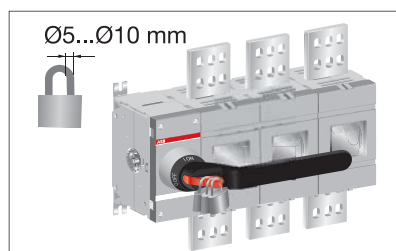


Control wiring

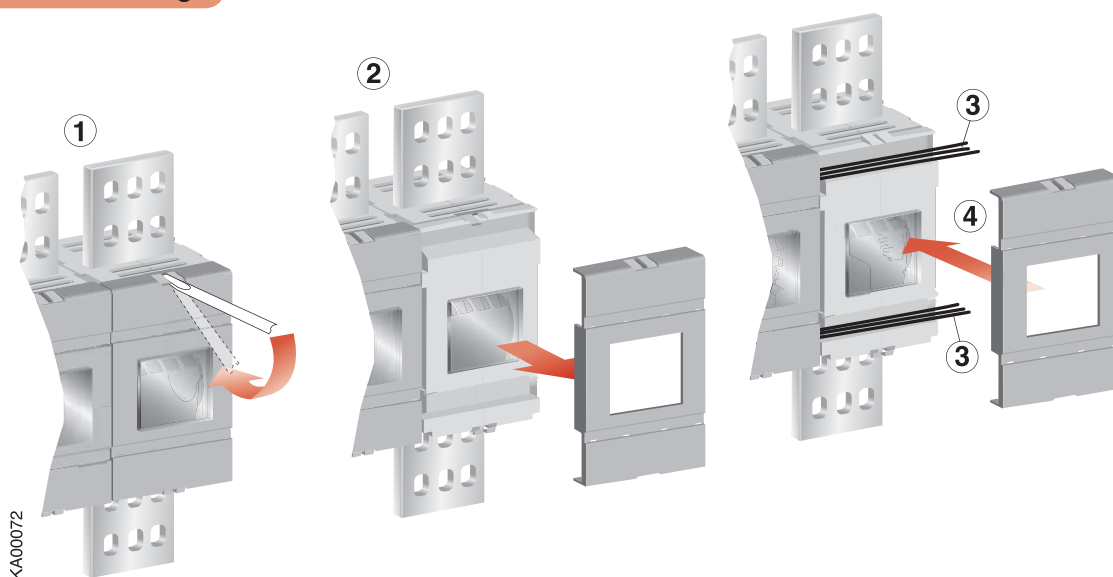

OT2000-2500

OTZT4

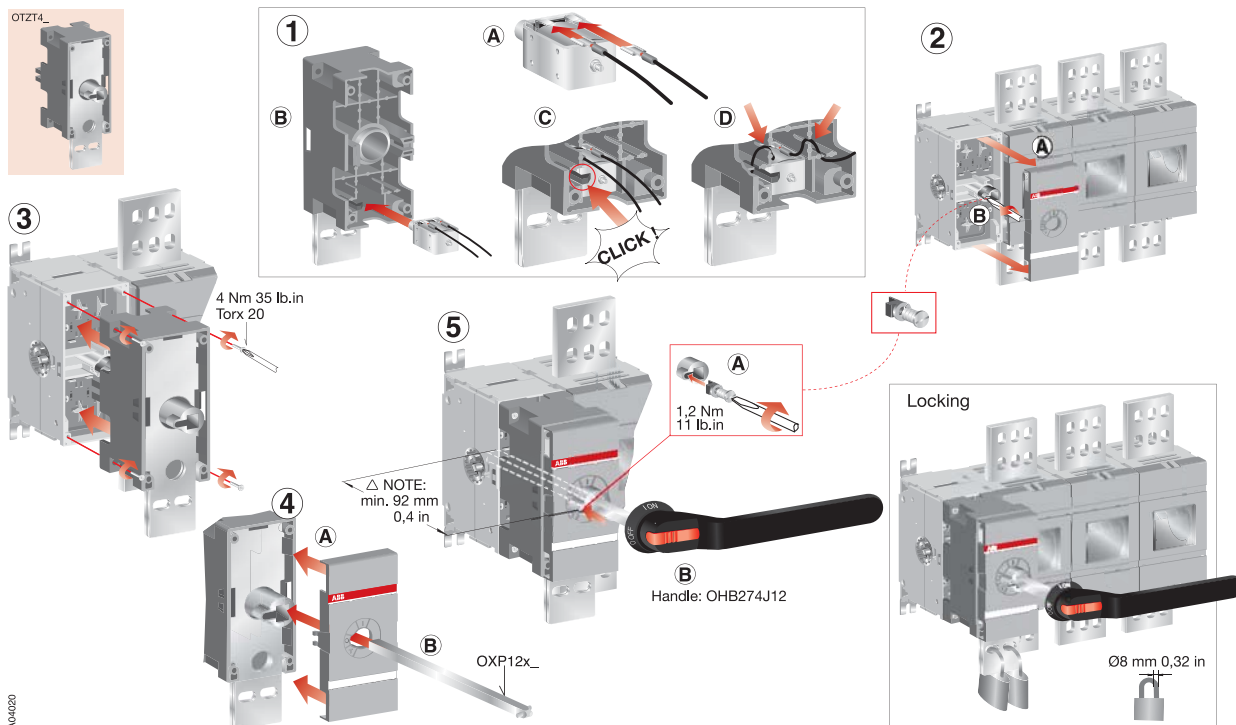

OA_

