




OT315-500

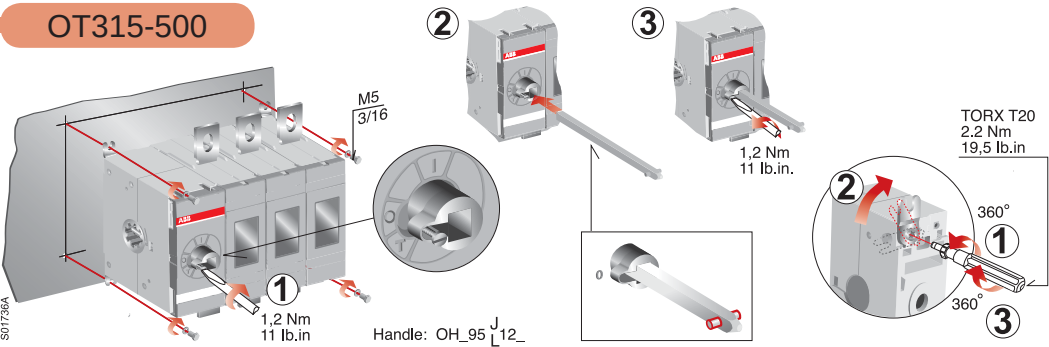


OT315-500E01-04

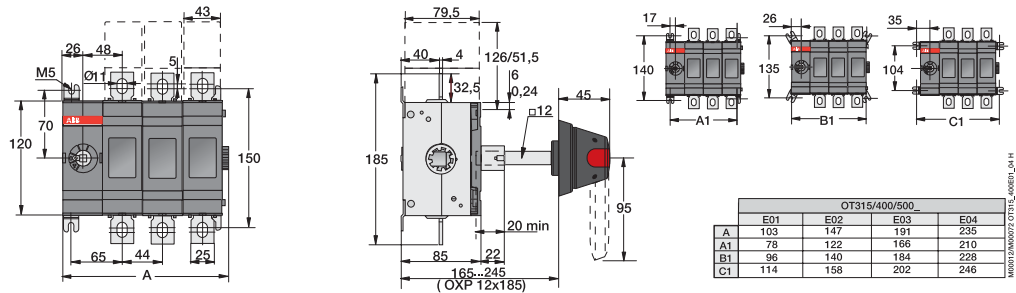


OT315-500E11-22

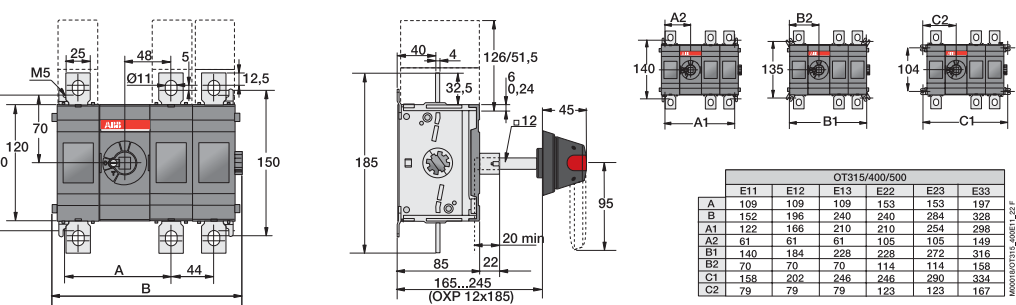


OT400U01-04

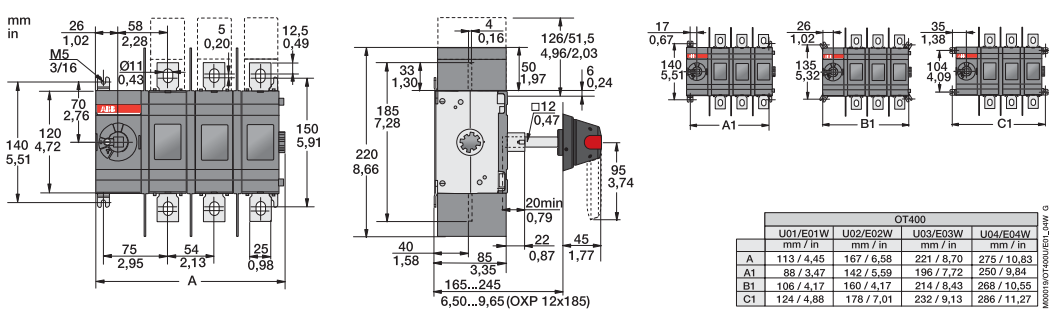


OT400U11-22

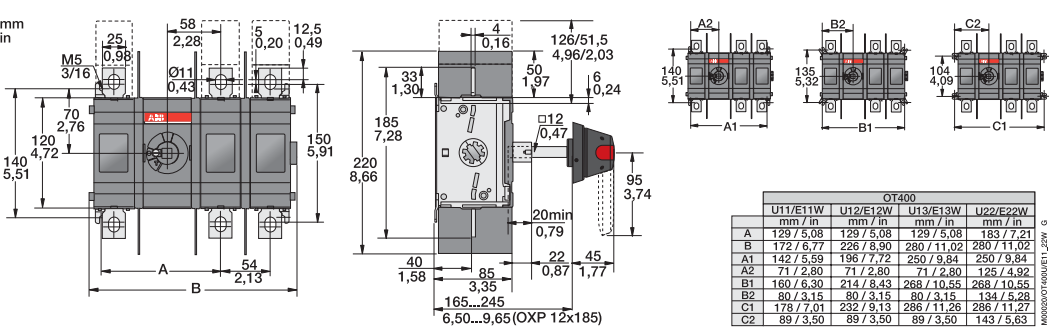


OTV

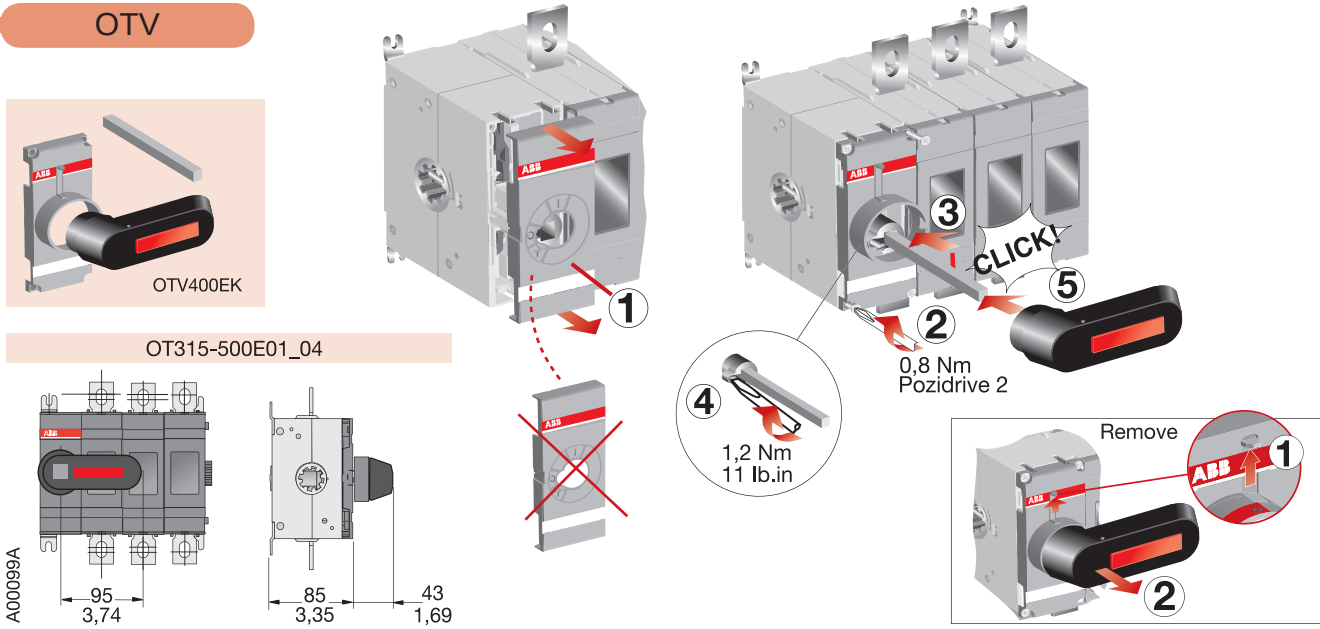

OT315-500E01_04

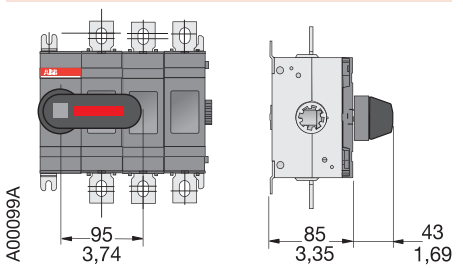

OTZ400E

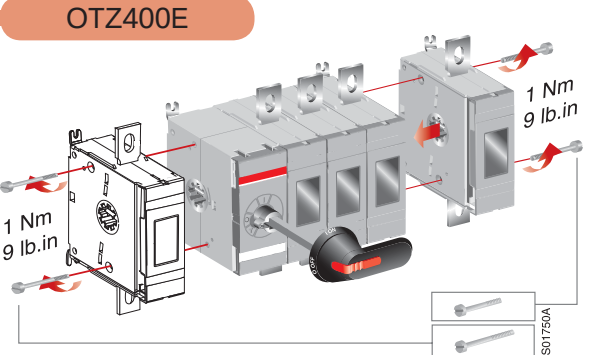


Clearances per UL98

Height mm/in	600/23,6
Width mm/in	350/13,8
Depth mm/in	200/7,9


A	0
B	13 mm 0,5 in
D	13 mm 0,5 in

MCM	C
250	250 mm/8 in
300	250 mm/10 in
350	300 mm/12 in


Minimum enclosure size or equivalent volume	
AWG	C
2	100 mm/4 in
1	100 mm/4 in
1/0	125 mm/5 in
2/0	150 mm/6 in
3/0-4/0	175 mm/7 in

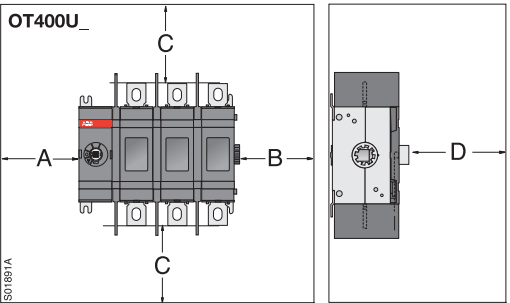



OZX_

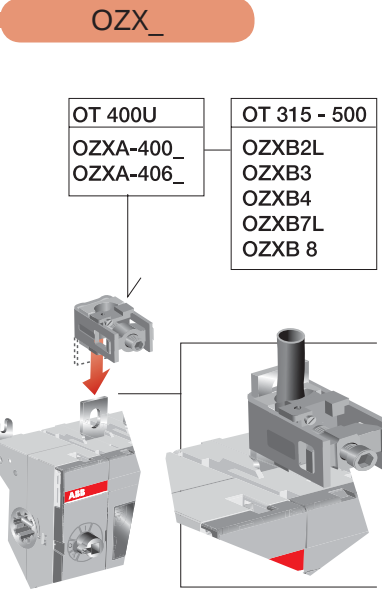


OTS_

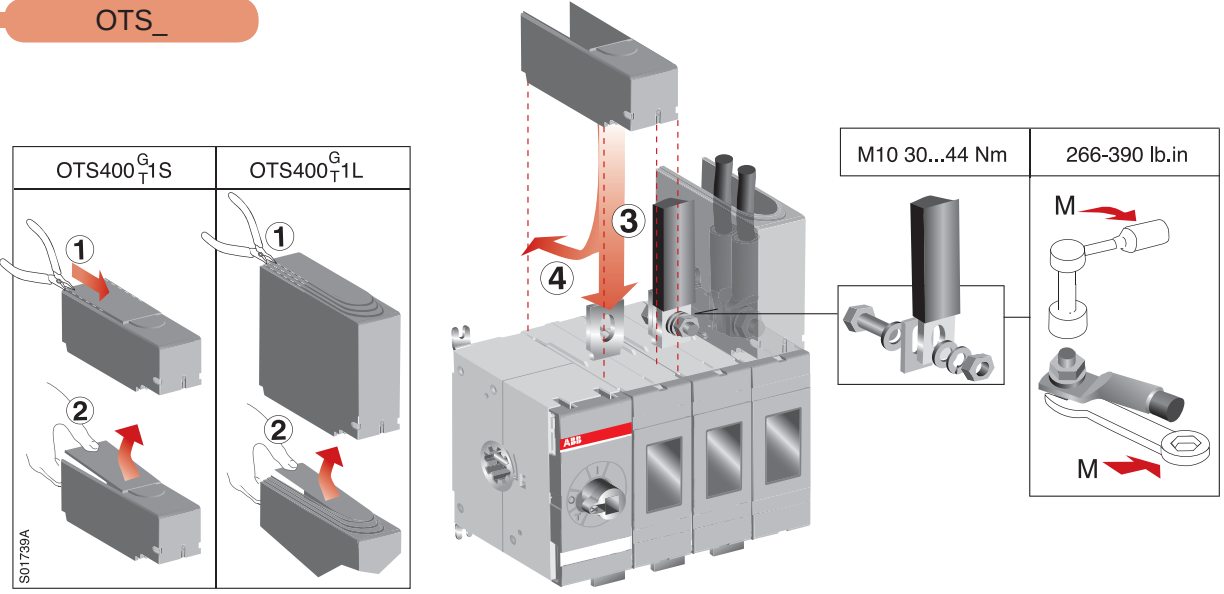


OA_

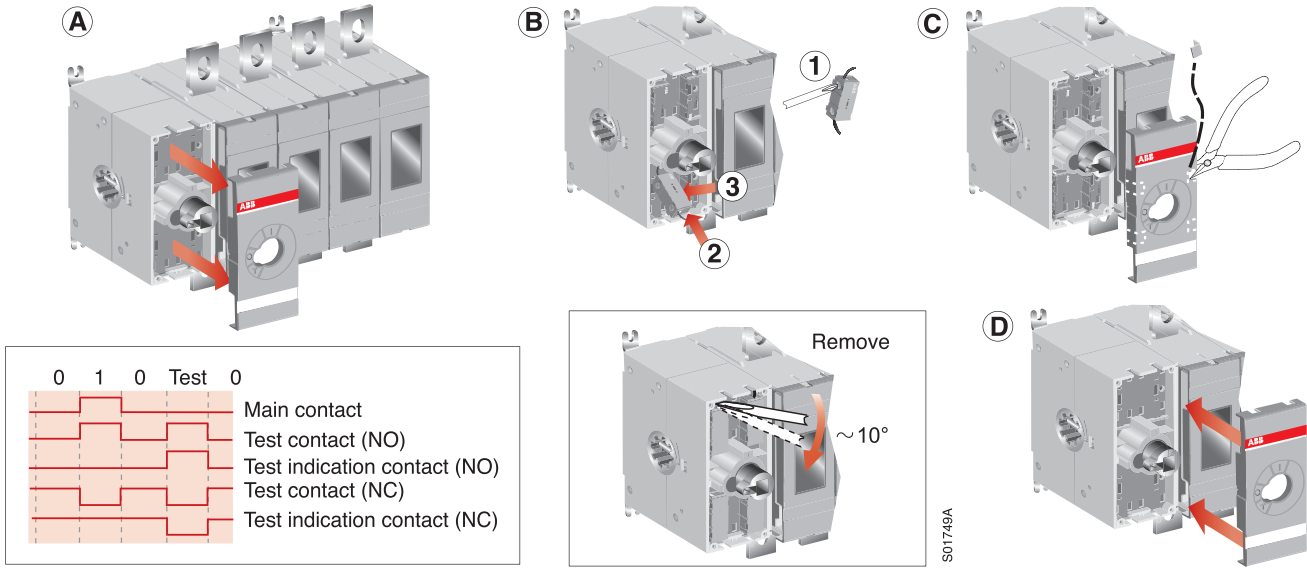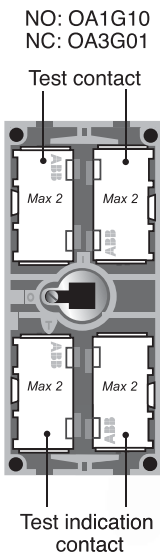

Label

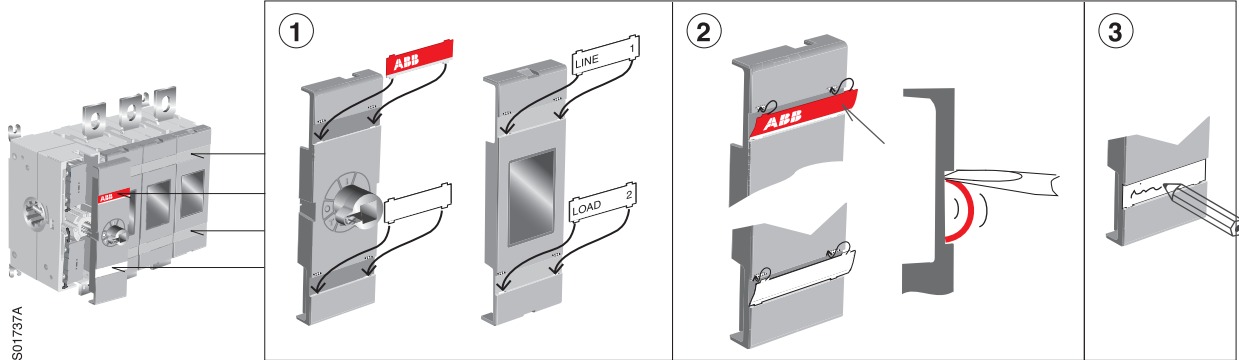

OEA_

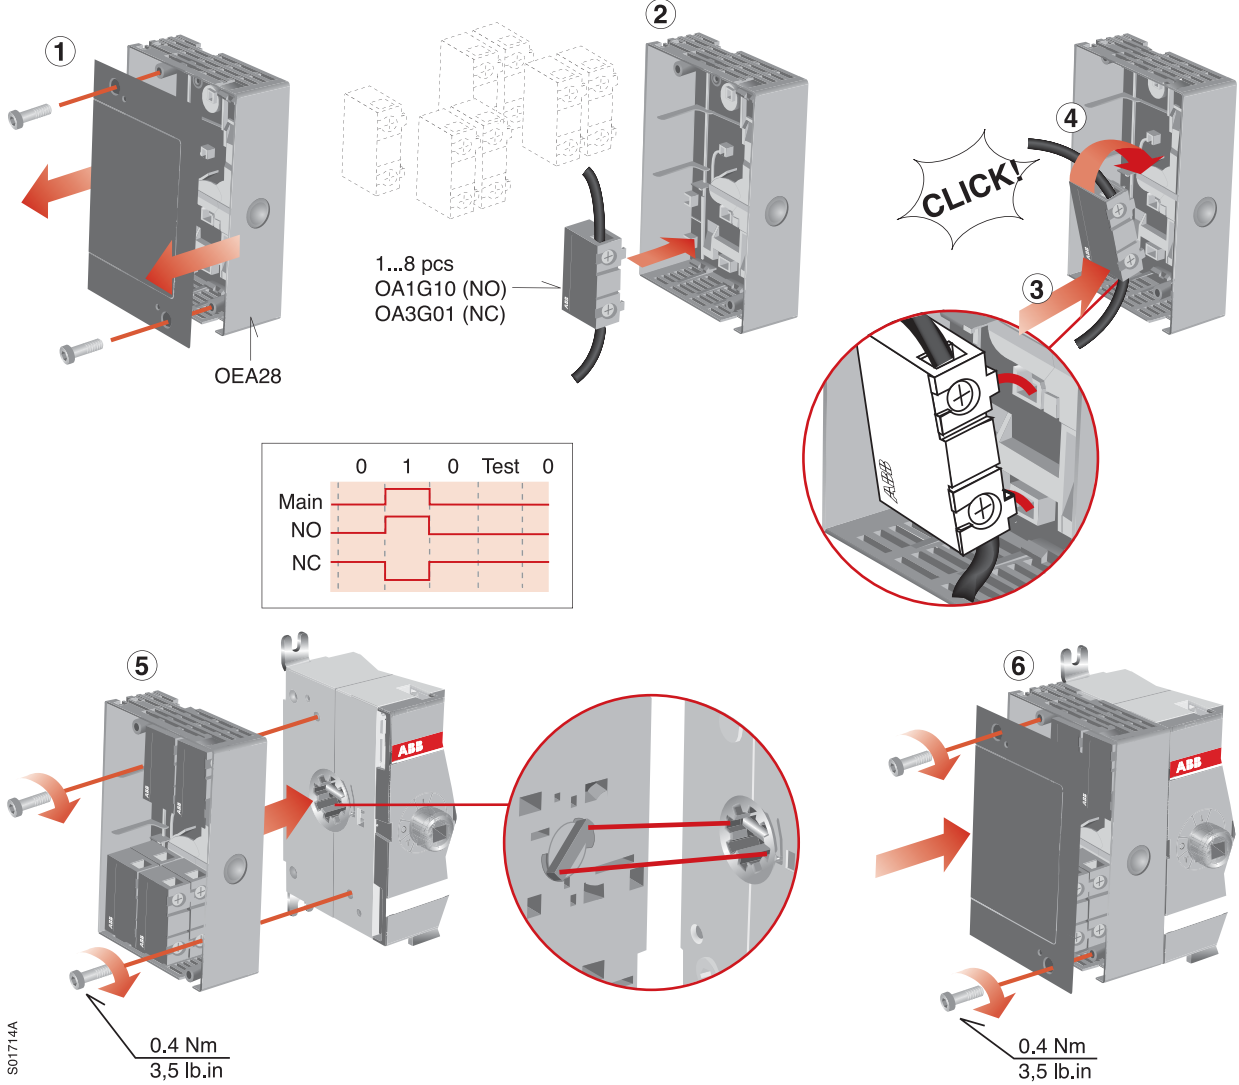

OTZT2_

